

Reduction Of Diesel Engine Emissions (HC, CO, NOX) Using Three Way Catalytic Converter

¹R.Radhakrishnan, ²C.Kupendran, ³G.Vinothkannan
⁴P.Nijanthan, ⁵S.Vignesh Sharma

¹Assistant Professor, Department Of Mechanical Engineering, Nadar Saraswathi College Of Engineering And Technology, Theni – 625 531. India

^{2,3,4,5}UG Scholar, Department Of Mechanical Engineering, Nadar Saraswathi College Of Engineering And Technology, Theni – 625 531. India

#Corresponding Author E-Mail: radhakrishnan18190@gmail.com

Received 14, March 2016 | Accepted 02, April 2016

ABSTRACT

This project work presents a new catalytic converter to be used for compressed ignition engine. The catalytic converter was developed based on catalyst materials consisting of metal oxides such as zirconium dioxide and titanium dioxide with wire mesh filter. Both of the catalyst materials such as zirconium dioxide and titanium dioxide are inexpensive in comparison with conventional catalysts such as palladium or platinum. The objective of this project work is to control the emission and to develop a low-cost three way catalytic converter. This catalytic converter is assembled with single cylinder four stroke diesel engine and emissions are measured using five gas analyser. Fuels were tested in a single cylinder diesel engine to improve the performance and control the emission.

Key words: zirconium dioxide, titanium dioxide, catalytic converter

1. INTRODUCTION

Pollution may be defined as “an unwanted/undesirable foreign matter added to environment in other words, Pollution may be defined as “the excessive discharge or addition of undesirable substances or unwanted foreign matter into the environment, thereby adversely altering the natural air quality of the environment, and causing damage to human, plant and living things under the earth.

Air pollution may be defined as any atmospheric condition which is getting polluted. These substances include gases (sulphur oxides, nitrogen-oxides, carbon monoxide, hydrocarbons etc), particulate matter (smoke, dust, fumes, aerosols etc) and radioactive materials and may others.

Air is polluted by dust, cement, coal and some gases. An individual inhales about 16 kg of air in a day. If the air is polluted it causes many ill-effects on human beings.

Hence reduction of automobile emission under the new development of this project may contribute towards green environment and reduce the global warming.

1.1 Major Source of Pollution

- Primary pollution.
- Secondary pollution.

Primary pollution contributes emission of harmful carbon monoxide (CO), unburned hydrocarbon (UHC), and oxides of nitrogen (NO_x) and particulate matter, where as secondary pollution contributes towards the green house effect.

CO formation: Carbon monoxide is formed due to incomplete combustion in combustion chamber.

HC formation: Unburned hydrocarbon is due to the evaporation of fuel from the fuel tank and also due to formation of unburned gases in the exhaust.

NOX / PM formation: oxides of nitrogen (NO_x) and particulate matter is formed due to improper combustion and formation of NO_x is mainly due to the availability of oxygen and presence of high combustion temperature.

S. No	TYPES OF SOURCES	FUEL	MAIN POLLUTANTS
1	Domestic heating, cooking	Wood, peat Biomass etc	pm, CO, NO _x
		Coal	pm, SO _x , CO, NO _x
		Coal, heavy oil	SO _x , NO _x
2	Industrial boilers, Power plants	Coal, heavy oil	pm, SO _x , NO _x
3	Manufacturing, industrial process		SO _x , Fluorides, Iron oxides
4	Transportation	Gasoline	CO, NO _x , Pb, HC, Oxidants, Ozone
		Diesel	pm, SO _x , NO _x , Odour

Table 1 : Sources and pollutants

2. CATALYTIC CONVERTER

A catalytic converter is a device used to reduce the exhaust pollutant gases from an internal combustion engine. As these precious metal usage and honeycomb structure become costliest affair, now the automobile company / after treatment device manufacturer undergoing research on alternate source on substrate and catalyst materials.

In this research, we develop a non-noble metal oxide based catalyst with high efficiency of catalytic activity performance as an alternative catalyst for carbon monoxide treatment emitted from vehicle emission.

The catalytic converter of the present invention is made by meticulous study on literature review and in depth study about usage of zirconium and its composition on catalyst material in combination with chemical reaction to reduce the CO, HC, and NO_x.

Today the most successful exhaust gas treatment techniques used are as follows,

- EGR – Exhaust Gas Recirculation.
- Catalytic converter
- Thermal Reactor
- SCR – Selective catalyst Reaction
- DPF – Diesel Particulate filter

Out of these, our interest on this project experiment is Catalytic converter.

CATALYTIC CONVERTER

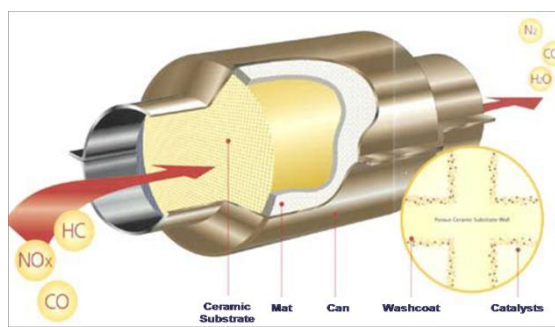


Fig.1. Cut Section of the Catalytic Converter

A catalytic converter is an after treatment device that reduce the exhaust pollutants from automobiles.

It has constructions as shown in the figure, it consists of honeycomb substrate, precious metal wash coat of platinum, palladium, rhodium.

3. Project Objective and Methodology

3.1 Objective

The objective of the project is to do research on engine exhaust after treatment control by using alternate source of material like zirconium for doing oxidizing reaction in catalytic converter to make cost effective solution.

In the scope of the project two combination of wash coat technology is under experimental research.

- Zirconium Dioxide
- Titanium Dioxide

Based on the result best wash coat technology will be selected

3.2 Methodology

In an existing catalytic converter the precious metals like platinum, palladium are normally used. To overcome from the cost and usage of

precious metals, it was an effort to identify by project experiment results by using alternate source of material like zirconium.

.The zirconium is selected in the ball type construction and tipped into the cobalt nitrate and copper sulfate solution in the wash coat technology. Wash coat assist in oxidation process to reduce the CO, HC emission. The new trials will prove the concept of alternate material comparison over precious metals employed in recent trends, and will enhance the feasibility of cost effective solution.

4. Project Progress

Catalyst selection: Following catalyst were considered for experimental study, based on results best choice will be selected and recommended for use.

- 1) Zirconium Dioxide
- 2) Titanium Dioxide

5. CONVERTER FABRICATION

Construction of catalytic converter: The exhaust gas after treatment device construction is having following phases

1. Drawing or layout preparation.
2. Drawing consists of assembly drawing and detailed drawing of individual components.
3. The selection of material.
4. Fabrication of catalytic converter outer casing.
5. Preparation of other sub components like cone and flanges.

Drawing or layout preparation

The zirconium catalysts are filled into the catalytic converter. The preparation of catalytic converter and its benchmarking observations are shown below,

The bench marking study shows following shapes,

- Cylindrical
- Oval construction

Out of these, cylindrical shape is selected because it has following advantages.

- Easy manufacturing feasibility,
- Uniform shape and structure formation,
- The manufacturing cost is less,

Purpose of cones fitment in the catalytic converter is to increase the gas velocity and to have uniform index and diffusion of pollutant to come in contact with zirconium catalyst for better oxidation reaction. The connecting of coupling flanges is made for connecting the exhaust gas line with catalytic converter at suitable locations.

The purpose of inner shell is to hold the zirconium catalyst in the gas path. The outer cylindrical shell is an external construction to protect and hold the whole internal catalyst construction.

Preparation of sub components

List of sub components are as follows,

1. Inner shell
2. Outer shell
3. Cone
4. Flanges
5. Support rings

Fabrication

Assembly of all sub components along with filled wash coat catalyst will make the all new zirconium catalytic converter ready for testing.

The catalytic converter assembly is represented in the below figure. It has two inbuilt cones for uniform indexing of gas and better converter efficiency.



Fig 7: Fabrication assembly

6.0 Experiment and Results

Catalytic converter test on a CI engine: The experimental engine is CI engine. Before taking the catalytic converter efficiency, the base engine emission readings are acquired by using AVL 5gas analyser.

Before taking the emission test, a leak check has to be conducted in the digital gas analyzer. The leak check is conducted by closing the probe's nozzle manually. The purpose of leak check is to discharge the residual gases through the gas analyzer's exhaust tube. The components present in the exhaust gas such as hydrocarbon, NO_x in parts per million and carbon monoxide, carbon dioxide, oxygen in percentage volume will be displayed in the digital gas analyzer.

Base Results and discussion

The emission results on engine with 5 engine operating modes with different speed and load conditions were conducted.


CONCLUSION

Due to increase in air pollution, the government agency started introducing the stringent emission norms to control the engine out emission from automobiles. The stringent emission norms started a new drive on development of low or ultra low emission engines by using latest trend of technology like Multivalving, CRDI, Variable valve lift, VGT turbo charger, Camless valve gearing, hybrid or alternate source of fuels.


But the new development of engine can have this latest trend on engine technology, but what about the existing engines and its overhead infrastructure involved in making the assembly and production. Hence it was a great solution to use the exhaust after treatment devices to control the existing engine out emission and passing the required current emission norms and certifications.

The current catalytic converters are using the oxidation process by employing the precious coat metal like platinum and palladium. To overcome from cost and reducing the rare metal usage the project made the drive to develop an alternate source of oxidation catalyst for oxidation reaction and thus reduces the NOx and HC emissions. The substrate selected in this project is wash coat technology employed by using the zirconium dioxide and titanium oxide. The catalytic converter is constructed with inner/outer shell construction supported with cones and flanges. The initial emission readings are conducted in the experimental engine. This catalytic converter reduces the harmful pollutant more efficiently and at a lower cost than the conventional catalytic converter.


CO-Graph

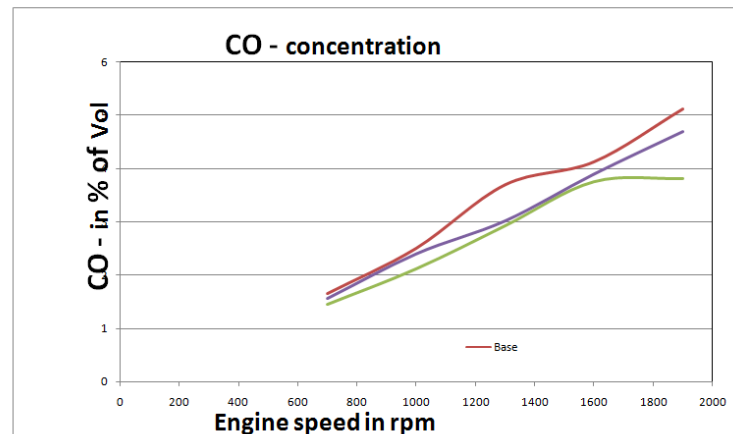

HC-Graph

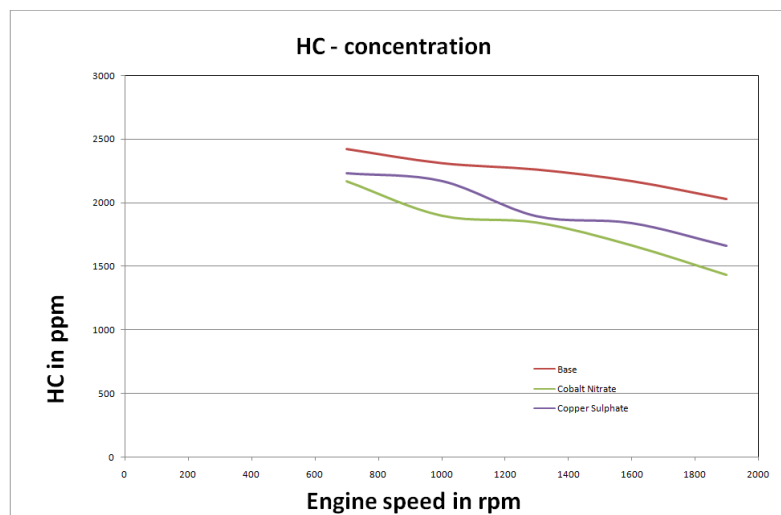

NO_x-Graph

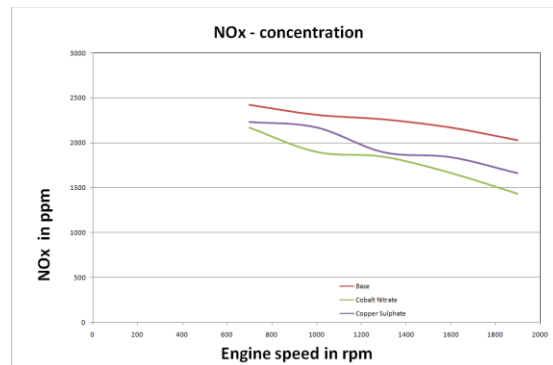

ACKNOWLEDGEMENT

The author would like to express a special thanks to Mr.R.Radhakrishnan Assistant professor of mechanical department for giving valuable guidance to complete my project. And many more thanks to Nadar Saraswathi College Of Engineering And Technology for giving opportunity to present in National conference.

REFERENCES

1. M A Kalam et al., 2009. Development and test of a new catalytic converter for natural gas fuelled engine. *Sadhana*, 34 (3), 467–481.
2. Imran Syakir Mohamad et al., 2009. Development of tin (IV) oxide based catalyst for carbon monoxide emission control. *Nuclear Science Journal of Malaysia*, 1(1), 1–10.
3. Grigorios C. Koltsakis et al., 1997. Catalytic automotive exhaust aftertreatment. *Prog. Energy Combust. Sci.* 23, 1–39.
4. William B. Retallick, et al., 1984. Catalytic converter for an automobile. *U.S. Patent 4576800*.
5. Filiz Balikci et al., 2007. Characterization and CO oxidation activity studies of co-based catalysts. *Turk. J. Chem.* 31, 465–471.
6. Wathanyu Amatayakul et al., 2001. Life cycle assessment of a catalytic converter for passenger cars. *Journal of Cleaner Production.* 9, 395–403.
7. Xavier Courtois et al., 2000. Three-way catalytic activity of zirconium-supported copper catalysts modified by rhodium. *Sci. Paris, Serie IIC, Chimie: Chemistry.* 3, 429–436.
8. Wu Guojiang et al., 2005. CFD simulation of the effect of upstream flow distribution on the light-off performance of a catalytic converter. *Energy Conversion and Management* 46, 2010–2031
9. Pradyot Patnaik, 2003. Handbook of Inorganic Chemicals *RR Donnelley: Press*
10. Svehla.G. 1979. Vogel's Text book of macro and semi micro qualitative inorganic analysis, 5th ed. New York Longman group limited.