

Experimental Investigation on Performance, Emission and Combustion Characteristics of Single Cylinder Diesel Engine Running on Desert Date (*Balanites Aegyptiaca*) Biodiesel

Prof. Ravi.S.D^{1*}, Dr.M.D.Harlapur, Prof.Puneeth.R.P³,
CHANDRASHEKAR.KAGGALAGOU⁴

¹Department of Mechanical Engineering, R. T. E. Society's Rural Engineering college
Hulkoti, Gadag, Karnataka, India-282205

¹Department of Mechanical Engineering, R. T. E. Society's Rural Engineering college
Hulkoti, Gadag, Karnataka, India-282205

¹Department of Mechanical Engineering, R. T. E. Society's Rural Engineering college
Hulkoti, Gadag, Karnataka, India-282205

*Corresponding Author Email: ravimech100@gmail.com

Abstract— Continuous rise in the conventional fuel prices and shortage of its supply have increased the interest in the field of the alternative sources for petroleum fuels. In this present work, experimentation was carried out to study the performance, emission and combustion characteristics of desert date biodiesel and its blends. For this experiment a single cylinder, four strokes, naturally aspirated, direct injection, water cooled, eddy current dynamometer Kirloskar diesel engine at 1500 rpm for variable loads. Initially, desert date biodiesel and its blends were chosen. The physical and chemical properties of desert date biodiesel were determined. The tests were carried out over entire range of engine operation at varying conditions of load. The engine performance parameters studied were brake horse power, brake specific fuel consumption, brake thermal efficiency, exhaust temperature and mechanical efficiency. The emission characteristics studied are CO, HC, NO_x and smoke opacity. These results are compared to those of pure diesel. These results are again compared to the other results of neat oils available in the literature for validation. By analyzing the graphs, it was observed that performance characteristics are reduced and emission characteristics are lowered compare to the diesel. This is mainly due to lower calorific value, higher viscosity and delayed combustion process. From the analysis of graphs it is observed that B10 and B20 blends are best suited for diesel engine. The present experimental results show that desert date biodiesel and its blends can be used as an alternative fuel in diesel engine.

Keywords: Biodiesel; desert date biodiesel; alternative fuel; Transesterification; Ethanol; Performance; Emissions; combustion.

1. Introduction

For more than two centuries, the world's energy supply has relied heavily on non-renewable crude oil derived liquid fuels. Out of which 90% is estimated as to be consumed for energy generation and transportation. It is also known that emissions from the combustion of these fuels such as CO₂, CO, NO_x and sulfur containing residues are

the principal causes of global warming. On the other hand, known crude oil reserves could be depleted in less than 50 years at the present rate of consumption. Thus, increased environmental concerns, tougher clean air act standards necessitates the search for a viable alternative fuels, which are environmentally friendly. Oil seed crops such as palm, soyabean, sunflower, peanut, olive etc are by far the largest group of exploitable renewable biomass resource for liquid fuel and energy generation. The attractive features of bio-diesel fuel are:

- It is a plant derived, not petroleum derived, and such its combustion does not increase current net atmospheric levels of CO₂, a greenhouse gas.
- It can be domestically produced, offering the possibility of reducing petroleum imports.
- It is biodegradable.
- Relative to conventional diesel fuel, its combustion products have reduced level of particulates, carbon monoxide, sulfur oxides, hydrocarbons etc.
- Vegetable oils can be used in diesel engines as they have high octane number and calorific value very close to diesel.

The present work aims to investigate the possibilities of the application of mixtures of biodiesel with diesel as a fuel for diesel engines. The present investigations are planned after a thorough review of literature in this field. The combinations of desert date biodiesel, along with diesel are taken for the experimental analysis.

2. Experimental Description

It is most commonly used and important method to reduce the viscosity of vegetable oils. In this process triglyceride reacts with three molecules of alcohol in the presence of a catalyst producing a mixture of fatty acids, alkyl ester and glycerol. The process of removal of all the glycerol and the fatty acids from the vegetable oil in the presence of a catalyst is called esterification. This esterified vegetable oil is called bio-diesel. Biodiesel properties are similar to diesel fuel. It is renewable, non-toxic, bio-degradable and environment friendly transportation fuel. After esterification of the vegetable oil its density, viscosity, cetane number, calorific value, atomization and vaporization rate, molecular weight, and fuel spray penetration distance are improved more. So these improved properties give good performance in CI engine.



Fig-1 separation of glycerine

The Fig -1 shows the separation of glycerine from the bio-diesel. After reaction the oil is kept in a settling funnel for the process of separation. In which biodiesel, glycerol and catalyst are separated.

3. Experimental Methodology

The experimental setup consists of a single cylinder, four strokes, diesel engine connected to an eddy current dynamometer for variable loading. The set is a stand-alone type independent panel box consisting of an air box, fuel tank, manometer etc. The set up enables the study of engine for brake power, BMEP, brake thermal efficiency, mechanical efficiency, specific fuel consumption, volumetric efficiency, A/F ratio, and emission characteristics like CO, CO₂, HC and NO_x.

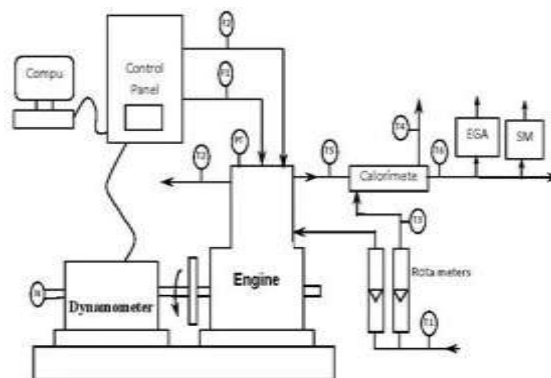


Fig. 2 Experimental Setup

The various components of the experimental set up are described. Fig.2 shows a line diagram and Fig.3 shows the photograph of the experimental set up. The important components of the system are,

- The engine
- Dynamometer
- Exhaust emission testing machine
- Calorimeter
- Fuel measuring unit
- Pressure sensor
- Temperature sensor
- Rotameter



Fig3. Photograph of experimental setup

Manufacturer	Kirloskar Oil Engines Ltd., India
Model	TV-SR II, naturally Aspirated
Engine	Single cylinder, DI, 4 strokes
Bore/stroke	87.5mm/110mm
Compression ratio	17.5:1
Speed	1500 r/min, constant
Rated power	5.2 kW
Injection pressure	240 bar/23° BTDC
Type of sensor	Piezo electric
Crank angle sensor	1-degree crank angle

Table 1 Technical specifications of the engine

4. Results and Discussion

Fuel properties and characteristics

The properties of the desert date biodiesel, diesel fuel and blends were determined and the results are shown in Table: 2

Properties	Diesel	BD 10	BD 20	BD 100	Equipment	BIS Specification
Calorific value (KJ/Kg)	42000	41953	41906	41532	Bomb calorimeter	-
Kinematics viscosity at 40°C (Cst)	2.54	2.79	3.05	5.1	Red wood viscometer	2.5 – 6.0
Density (kg/m ³)	830	835	839	875	Hydrometer	860-900

Flash Point (°C)	54	65	76	165	Pensky marten's	≤ 120
Fire Point (°C)	64	75	88	175	Pensky marten's	-

Table 2 Properties of diesel and desert date biodiesel blend

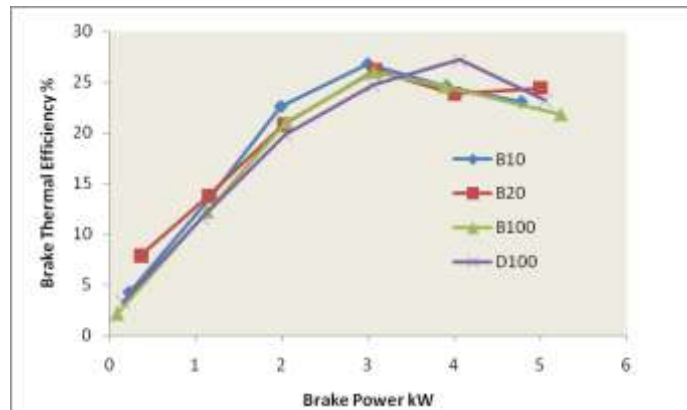


Fig -4: Variation of brake thermal efficiency with brake power

The variation of brake thermal efficiency with brake power for diesel, desert date biodiesel and their blends are shown in Fig 5. Brake thermal efficiency is increasing with increasing brake power for all multi-blends of biodiesel and diesel. It may be due to reduction in heat loss and increase in power with increase in load. Brake thermal efficiency of 10% blend is very close to diesel for entire range of operation. Maximum brake thermal efficiency of 10% blend is 26.82% against, 27.22% of diesel oil, which is lower by 0.4%. We can say that brake thermal efficiency of 10% blend is very well comparable with diesel. The maximum brake thermal efficiency of 20% and neat desert date oil are 26.18% and 26.037% against 27.22% of diesel.

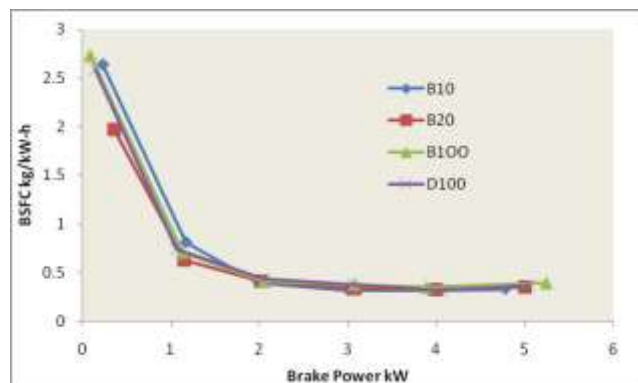


Fig -5: Variation of specific fuel consumption with brake power

The variation of brake specific fuel consumption (BSFC) with brake power for diesel, desert date oil and its blends shown in Fig 6. BSFC of 10% blend closely matches with diesel, followed by 20% blend. Minimum BSFC of 10% blend and 20% blend are

0.318 kg/kW-h and 0.322 kg/kW-h against 0.315 kg/kW-h of diesel oil. BSFC of neat desert date biodiesel oil is 0.037 kg/kW-h higher than of diesel oil.

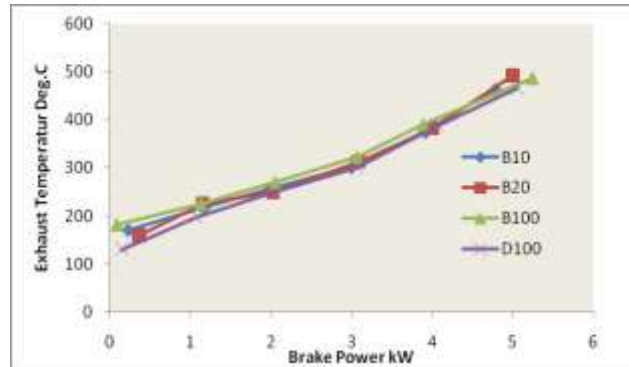


Fig -6: Variation of exhaust gas temperature with brake power

Fig 6 shows the variation of Exhaust Temperature (ET) with brake power output for desert date biodiesel and its blends with diesel in the test engine. The exhaust temperature of 10% blend of desert date biodiesel has lower values compared with all other blends and is well comparable with diesel, the exhaust temperature of all blends and diesel increases with increase of operating load. The 10% blend of desert date biodiesel has higher performance than other blends due to reduction in exhaust loss.

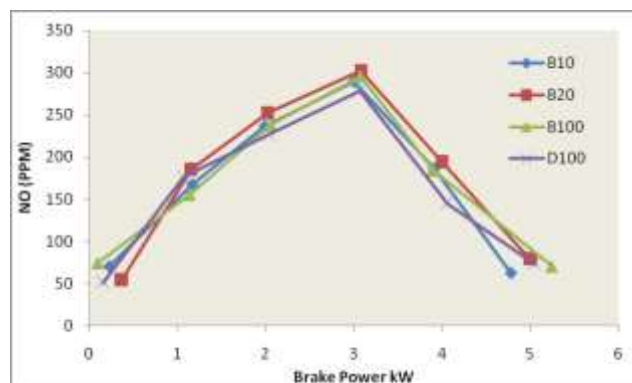


Fig -07: Variation of NOx with brake power

Fig. 07 shows the variation of nitrogen oxides emission with brake power output for desert date biodiesel oil and its blends with diesel in the test ring. The NO_x emission for biodiesel and its blends is higher than that of diesel. The NO_x of 10% blend is very close to diesel for entire range of operation followed by the neat biodiesel. The maximum NO_x emission of 10% and neat biodiesel is 289ppm and 295ppm against 278ppm of diesel. The maximum NO_x emission for the 20% blend is 295ppm.

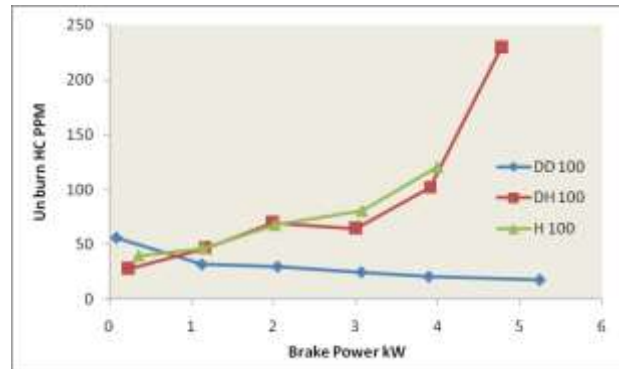


Fig -08: Variation of hydrocarbon with brake power

The variation of unburnt HC with brake power is shown in fig-19. The values of HC for DH100 and H100 are increases with the increases of load, but in case of desert date biodiesel is decreases with the increases of load.

5. Conclusions:

Experimental investigations are carried out on a single cylinder diesel engine to examine the suitability of desert date biodiesel as an alternate fuel. The performance, combustion and emission characteristics of blends are evaluated and compared with diesel. No difficulty was faced at the time of starting the engine and the engine ran smoothly over the range of engine speed. From the above investigation, the following conclusions are drawn.

- The properties viz; density, viscosity, flash point and fire point of desert date biodiesel is higher and calorific value is 0.98 times that of diesel.
- Performance, combustion and emission characteristics of 10% blend is better than other blends, followed by 20% blend. And efficiency of 10% blend is well compare with the diesel. The maximum brake thermal efficiency of 10% and 20% are respectively 26.82% and 26.18% against, 27.22% of diesel.
- The maximum brake thermal efficiency of neat desert date biodiesel is 26.037% against 27.22% of diesel.
- The minimum BSFC of neat biodiesel is 0.037 kg/kW-h higher compared with diesel.
- Unburnt HC, CO and NO_x emissions at maximum load for neat desert date biodiesel compared with diesel are higher by 1ppm, 0.022 vol%, and 17ppm, respectively.
- The maximum brake thermal efficiency of desert date biodiesel, DH100 and H100 are 26.0375%, 25.063% and 25.01% respectively.
- The CO emission and unburnt HC of desert date biodiesel is lower than D100 and H100. this could be the reason for higher efficiency of desert date biodiesel. The maximum value of CO for desert date biodiesel, DH100 and H100 are 0.05%, 0.17% and 0.37% respectively.
-

6. REFERENCES

- [1] G. Sindhu, M. Swetha –Production of biodiesel by Transesterification of different plant oils| August 2011
- [2] Sejal Narendra Patel and Ravindra Kirar — An Experimental Analysis of Diesel Engine Using Biofuels at Varying Compression Ratio| ISSN 2250-2459, Volume 2, Issue 10, October 2012
- [3] O.D. Hebbal, K.Vijaykumar Reddy and K.Rajagopal –Performance characteristics of a diesel engine with deccan hemp oil| Science direct fuel 85 (2006) 2187-294
- [4] Heywood, J. B.(1988).-Internal combustion engine fundamentals|. ISBN0-07-100499-8.
- [5] Introduction to IC engine The Goodheart-Willcox Co
- [6] Internal combustion engine by V.Ganesan second edition ISBN 0-07- 049457-6
- [7] D. Ramesh and A. Sampathrajan –Investigations on Performance and Emission Characteristics of Diesel Engine with Jatropa Biodiesel and Its Blends| the CIGR Ejournal. Manuscript EE 07 013. Vol. X. March, 2008.